



Thermal Spray Aluminum for Aluminum Corrosion Prevention

Planning, Production Processes and Facilities Panel

March 12, 2015
Charleston, SC

Problem:

- Aluminum is part of the Navy's \$3B ship corrosion problem
 - Mg-Al 5000 series (5086, 5083, 5059, 5456) alloys will sensitize over time, which becomes exfoliation or worse, stress corrosion cracking (SCC)
- Sensitization and SCC are already a huge repair problems on CG 47 superstructure, and are already emerging on LCS
- 50% of USN ships under contract or construction use aluminum significantly – LCS, LHA, JHSV, SSC, CVN
 - It's not limited to an in-service repair problem
- Aside from Low Solar Absorption (LSA) paint, there is **no preventative treatment** for 5xxx alloys short of replacement!


Sensitization and SCC

Residual stress from forming or welding, or applied stress (e.g. ship motion in a seaway)- very difficult to avoid

Painted aluminum alone is NOT an effective barrier

Corrosive Environment

**Tensile Stress
At Surface**

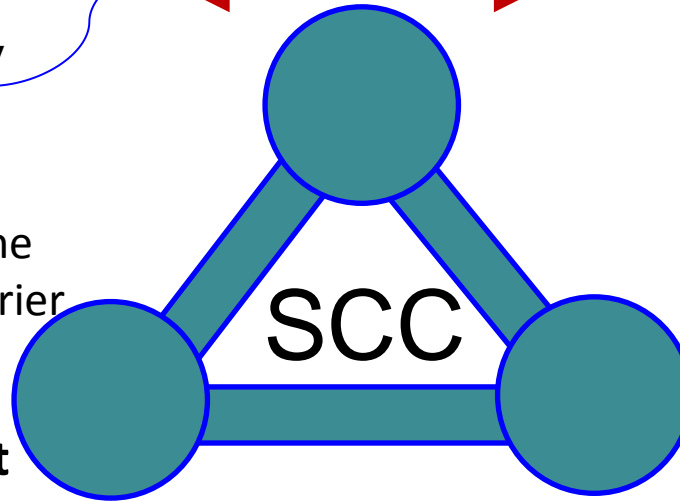


Sensitization: Mg_2Al_3 'β phase' forms at higher temp and migrates to grain boundary

Even strain-hardened tempers H116 and H321 will form β phase after years of exposure at in-service temperatures <150F

Susceptible Material




Objective: Break one or more legs of the triangle to avoid SCC

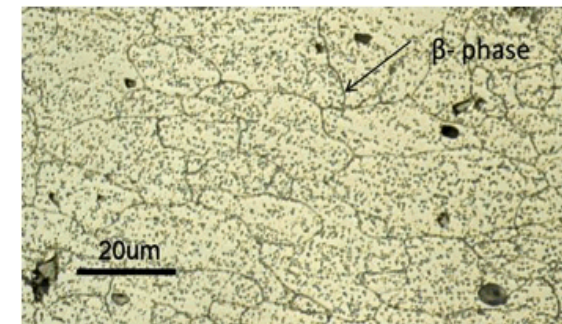

Electric Arc Thermal Spray


- Two wires are melted in arc, and propelled onto surface by compressed air
- Particles ‘pancake’ onto surface, solidify, and contract
- Subsequent passes build additional thickness at ~90% densification, 10% voids, typ. to 0.010 inch thickness
- A mature, fairly cheap and quick* metallic coating, but voids are a concern

*NSRP NASSCO/DTRC “Procedure Handbook for Shipboard Thermal Sprayed Coating Applications” 3/92

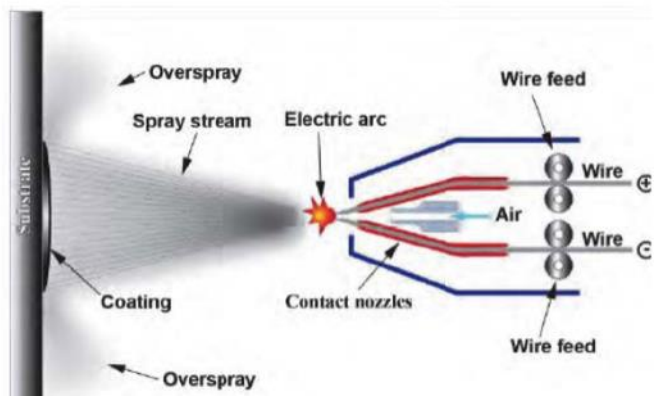

NMC R2519 Rapid Response project

- For CVN application, Thermal Sprayed Commercially Pure (CP) aluminum was applied to sensitized Al substrate
- Worst case: NO paint was applied
- While untreated samples failed, Thermal Spray passed both 1000 hour scribed, acidified salt fog test (no indications) and 6 month SCC U-bend tests (no failures)

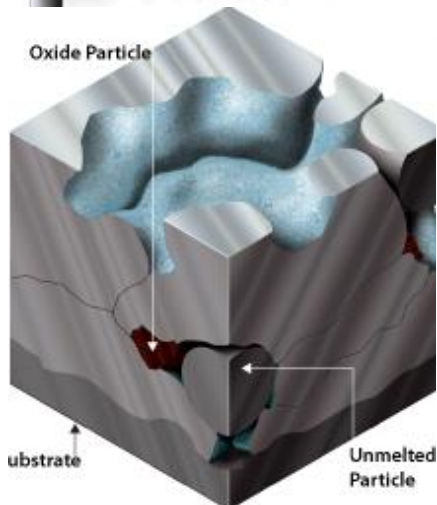


-Voids are STILL a concern for 35 yr life

Thermal Spray + Paint Can Work – As a System

Even without paint, Thermal Sprayed CP Aluminum is an effective barrier to environment for substrate (R2519, 6 month SCC and 1000 hour acidified salt fog)

WITH paint, the combination should provide an extremely durable composite environmental barrier

Thermal sprayed CP Aluminum, 90% densified

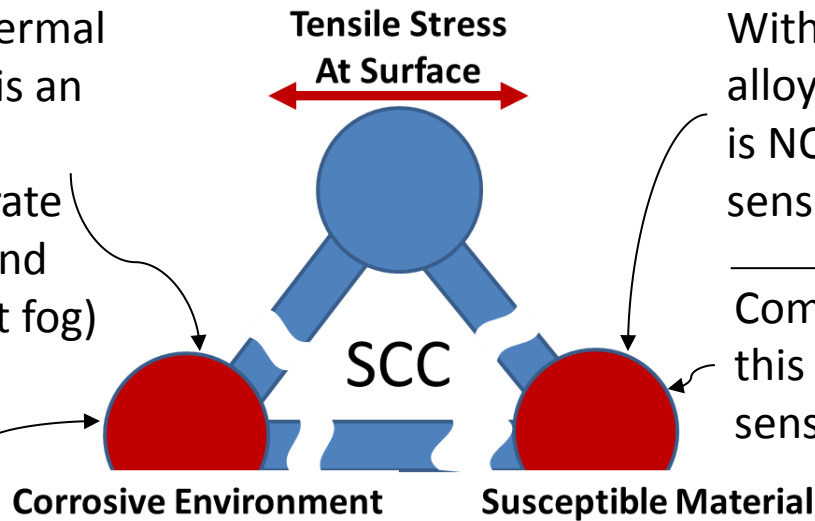

With no magnesium in the alloy, CP Aluminum coating is NOT SUSCEPTIBLE to sensitization

Combined with an LSA paint, this will also preclude further sensitization of the substrate



Questions to be answered

- What is the application rate of thermal spray in a shipyard environment?
- What is the bond strength of Thermal Spray Aluminum + Paint on Aluminum substrate?
- How sensitive is this system to surface preparation and environment during application?
- Combined with Ultrasonic Impact Treatment (UIT)- or in lieu of UIT?
- The combination of paint + Thermal Spray essentially creates a composite coating layer. What type of material performs best here?
- Is it a suitable substrate for non-skid?
- What is the minimum thermal spray thickness required? What is the maximum?
- Is CP aluminum the ideal substrate- or are there others (perhaps anodic to surface) which could perform better?
- What are the cost and weight impacts?
- What else not included on this list?

Questions and Comments?

For follow up, please contact:

Mark Smitherman, CTC
(814) 262-2340
smitherm@ctc.com

Rob Mason, CTC
(727) 549-7246
masonr@ctc.com