

**Ingalls
Shipbuilding**

A Division of Huntington Ingalls Industries



GENERAL DYNAMICS
Bath Iron Works

Retention of Type VI Epoxy under UHS Epoxy

NSRP All Panel Meeting
3/9/17

Conlan Hsu
Structural Engineer

- Ingalls Shipbuilding (Project Lead)
 - Conlan Hsu, John Hurley, Sean Murphy, Keith O'Brien, Jay Pertuit, Josh Reeder, John Walks
- Elzly Technology
 - Pete Ault, Eric Shoyer
- Bath Iron Works
 - Robert Cloutier
- ATI
 - Frances Pearce (Project Manager)
- Electric Boat
 - Mark Gaynor (Project Technical Representative)



- Current specifications for tanks and critical spaces require a MIL-PRF-23236 Type VII Ultra High Solids (UHS) epoxy coating over bare steel
- This requires either retaining Pre Construction Primer (PCP) through the entire build process until late-stage final paint application, or to apply the first coat of a multi-coat Type VII epoxy earlier in the build
- PCP will not provide adequate corrosion protection of the steel over long periods of weather exposure
- UHS epoxy can be damaged or burned during construction, and is difficult and expensive to repair

Type VI epoxy could economically bridge this gap if it can be retained for final painting



- This project will develop the data needed to request Navy approval to apply a Type VII UHS epoxy over a Type VI epoxy in critical coated areas
- This would apply to areas that would normally receive one to two coats of Type VII UHS epoxy



Project Work Breakdown Structure (WBS)

- Task 1: Identify Target Applications, Requirements, and Constraints
- Task 2: Select Candidate Systems
- Task 3: Finalize Applications and Test Requirements
- Task 4: Develop Test Plan
- Task 5: Fabricate Test Articles
- Task 6: Perform Testing
- Task 7: Issue Final Report




- International
 - Type VI: Intergard 264
 - Type VII: Interbond 998, Interline 783
- PPG
 - Type VI: Amercoat 240
 - Type VII: Amercoat 240
- Sherwin Williams
 - Type VI: SeaGuard 5000 HS
 - Type VII: Fast Clad ER, Dura-Plate




- Pull Off Adhesion (ASTM D4541)
- Knife Adhesion (ASTM D6677)
- Cathodic Disbondment
- Immersion
- Condensing Humidity



- 6"x12"x1/8" steel panels
- Apply initial coat
- Simulate burn/weld defects
 - For adhesion & immersion only
- Age & Weather for 3-4 months
- Apply Surface Prep
- Apply final coat
- Ready for testing

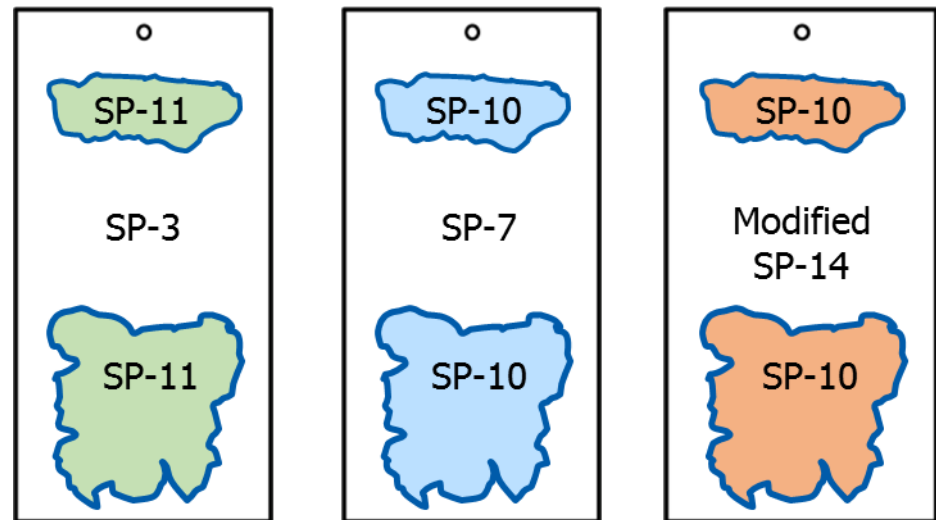

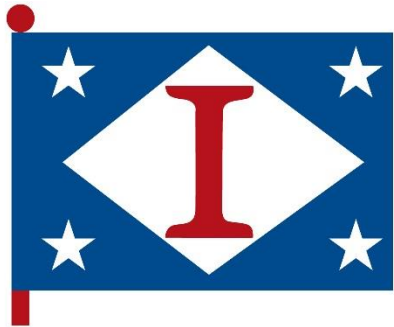

Ingalls Shipbuilding

A Division of Huntington Ingalls Industries